

# Airborne Particle Counter **KC-22A**

**0.1  $\mu\text{m}$ , compact and lightweight, high output,  
uses optical system with excellent stability**



- Compatible with JIS B 9921: 1997
- Diode pumped solid state laser assures exceptional durability
- Equipped with RS-232C interface as standard, enabling automatic computer measurement
- Printer output of measurement results is possible (Printer available as option)

## Specifications [KC-22A]

Optical system	Light-scattering method
Light source	Diode pumped solid state laser (wavelength 1 064 nm), open-cavity type
Laser diode	Wavelength 800 nm, rated output power 1 W
Laser medium	Nd: YVO <sub>4</sub>
Laser product class	Class 1, IEC 60825-1
Light detector	Photodiode
Air flow method	Purified sheath air envelops sample air coaxially
Flow rate	2.83 L/min
Calibration	With polystyrene latex (PSL) particles (refractive index 1.6) in clean air
Minimum particle size	0.1 $\mu\text{m}$ (with PSL particles of refractive index 1.6)
Size range (5 channels)	$\geq 0.1 \mu\text{m}$ , $\geq 0.15 \mu\text{m}$ , $\geq 0.2 \mu\text{m}$ , $\geq 0.3 \mu\text{m}$ , $\geq 0.5 \mu\text{m}$
Maximum particle number concentration	10 000 particles/L (coincidence loss 5 %)
False countrate	One count or less per 5 minutes
Measurement modes	
Manual measurement mode	After being started, measurement continues until a stop command given
Automatic measurement mode	After being started, measurement continues for the preset measurement time
Measurement time	1 to 600 sec
HOLD	Measurement value retained until start of next measurement
REPEAT	After completion, measurement is automatically repeated after pause intervals of about 10 seconds
Numeric display	Particle count (max. 6 digits), alarm level setting, measurement time, protect, error
Input / Output connectors	
EXT terminal	Test I/O terminal
Alarm terminal	ALARM 1 terminals are shorted by relay contact when alarm occurs (max. contact load: 30V DC, 1 A) Alarm level: 1 to 1 000 and alarm off
Serial terminal	RS-232C interface
Environmental conditions for operation	+15 to +35 °C, less than 85 % RH (no condensation)
Power	100 V AC $\pm 10$ %, 50/60 Hz, Approx. 80 VA
Dimensions and weight	185 (H) x 155 (W) x 330 (D) mm (excluding protrusions), Approx. 7.5 kg
Accessories	Sampling pipe x 1, Sampling tube (2 m) x 1 Filter x 1, Power cord (for use in Japan, 2.5 m) x 1

Factory options	D/A converter interface (KZ-25L) Outputs particle count of the selected channel converted to 4mA to 20 mA DC current Range: Selection of one of the following: 0 to 10, 0 to 100, 0 to 1 000, 0 to 10 000, 0 to 100 000 0 to 16, 0 to 256, 0 to 4 096, 0 to 40 960, 0 to 409 600
-----------------	--

\* Company names and product names mentioned in this catalog are usually trademarks or registered trademarks of their respective owners.  
\* Specifications subject to change without notice.


## RP monitor K9461 Ver. 2

Option

Enables automatic control of particle counter, data collection, real-time graph display, filing and printout using a computer

- Enables data processing using spreadsheet software (Windows Excel, etc.)
- Enables one-to-one control of RION particle counters in the RS-232C mode

Compatible OS: Microsoft Windows 2000/XP

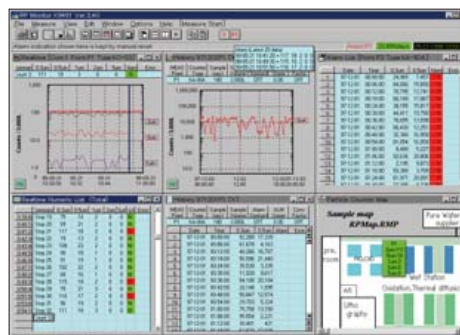

Sample display



## Printer KP-06

For unattended measurement data recording, measurement, management and control

- Enables max. 99 repeated measurements and printing of the average values
- Enables printing of particle size range total and single values in max. 6 channels
- Compatible with lint-free thermo-sensitive recording paper
- Requires separate communication cable (CC-61, not included)



## Principle of sensor optical system

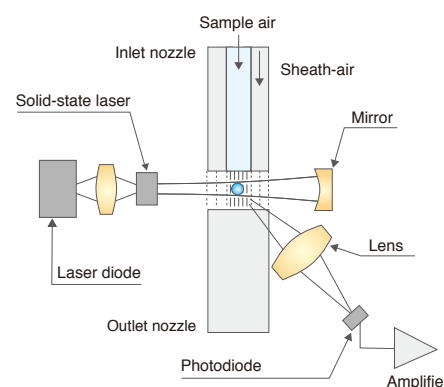

ISO 14001 RION CO., LTD.  
ISO 9001 RION CO., LTD.

Distributed by:

**RION CO., LTD.**  
<http://www.rion.co.jp/english/>

3-20-41, Higashimotomachi, Kokubunji,  
Tokyo 185-8533, Japan  
Tel: +81-42-359-7878, Fax: +81-42-359-7458